


HARDI PUMP GREASE

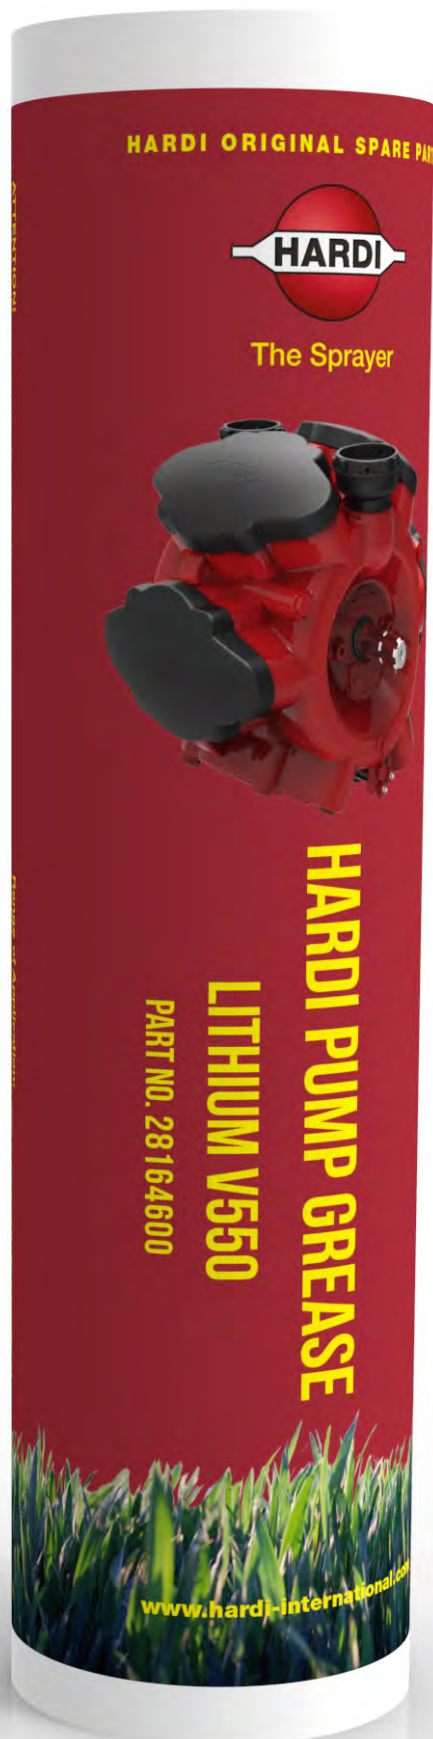

Improved adhesiveness

For better lubrication between service intervals

Stronger lubrication performance

Also during warm weather and intensive usage

High internal protection

During season and winter storage

HARDI pump grease

- Original HARDI pump grease
- For ambient temperature range

For all HARDI pumps

- Normal operation: Grease every 50 hours
- After disassembling the pump: See instruction for recommended amount

Range of Application

HARDI pump grease is designed for the lubrication of heavily loaded bearings. It has excellent load carrying capacity, excellent shear stability and superb rust preventing properties. It has very strong adhesive properties thus suitable for use in HARDI diaphragm pumps.

Description

HARDI pump grease Lithium V550 is a lithium complex multi-purpose, heavy duty grease based on high viscous mineral oils, containing antioxidants, extreme pressure and wear preventive additives and rust inhibitors.

Safety Data Sheet:

www.hardi-international.com/pumpsafety




HARDI PUMP GREASE LITHIUM V550




500 - 503




600 - 603




321




1200 - 1203



1300 - 1303



360 - 364



460 - 464

Example - Eksempel - Beispiel - Exemple - Ejemplo - пример

<p>50 hours 50 timer 50 Stunden 50 heures 50 horas 50 часов</p> <p>Normal operation Normal drift Normalbetrieb Fonctionnement normal Operación normal Нормальная операция</p>	<p>Diaphragm renewal Membran fornyelse Membranerneuerung Renouvellement diaphragm Renovación de diafragma Обновление Диафрагма</p>	<p>New bearings Nye lejer Neue Lager Nouveaux roulements Rodamientos nuevos Новые подшипники</p>
---	--	--

Model	gram total	ounce total	gram total	ounce total	gram total	ounce total
500 - 503	6	0.2	40	1.4	60	2.1
600 - 603	10	0.4	60	2.1	100	3.5
321	10	0.4	60	2.1	100	3.5
1200 - 1203	13	0.5	90	3.2	130	4.6
1300 - 1303	3 x 5	3 x 0.2	3 x 35	3 x 1.2	3 x 50	3 x 1.8
360 - 363	50	1.8	350	12.4	500	17.6
364	2 x 30	2 x 1.1	2 x 200	2 x 7.1	2 x 300	2 x 10.6
460 - 463	50	1.8	350	12.4	500	17.6
464	2 x 30	2 x 1.1	2 x 200	2 x 7.1	2 x 300	2 x 10.6



HARDI INTERNATIONAL A/S
Herthadalvej 10
4840 Nørre Alslev • Denmark
www.hardi-international.com

The Sprayer